



- T 2" S9.5B SURFACE COURSE AT THE RATE OF 220 POUNDS PER SQUARE YARD
- B 2 1/2" TYPE 119.0C BINDER COURSE AT THE RATE OF 285 POUNDS PER SQUARE YARD
- S 8" COMPACTED AGGREGATE BASE COURSE

**TYPICAL DRIVE SECTION**  
STA. 0+00 TO 8+30.70

**ESTIMATED QUANTITIES**

S9.5B SURFACE COURSE 530 TONS  
119.0C INTERMEDIATE COURSE 690 TONS  
AGGREGATE BASE COURSE 2,310 TONS

QUANTITIES SHOWN ARE ESTIMATED AND FROM BEST AVAILABLE INFORMATION. CONTRACTOR SHALL VERIFY QUANTITIES PRIOR TO SUBMITTING BID FOR PROJECT.

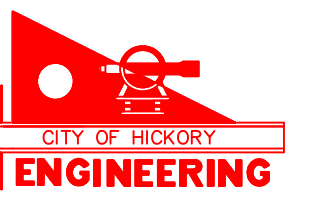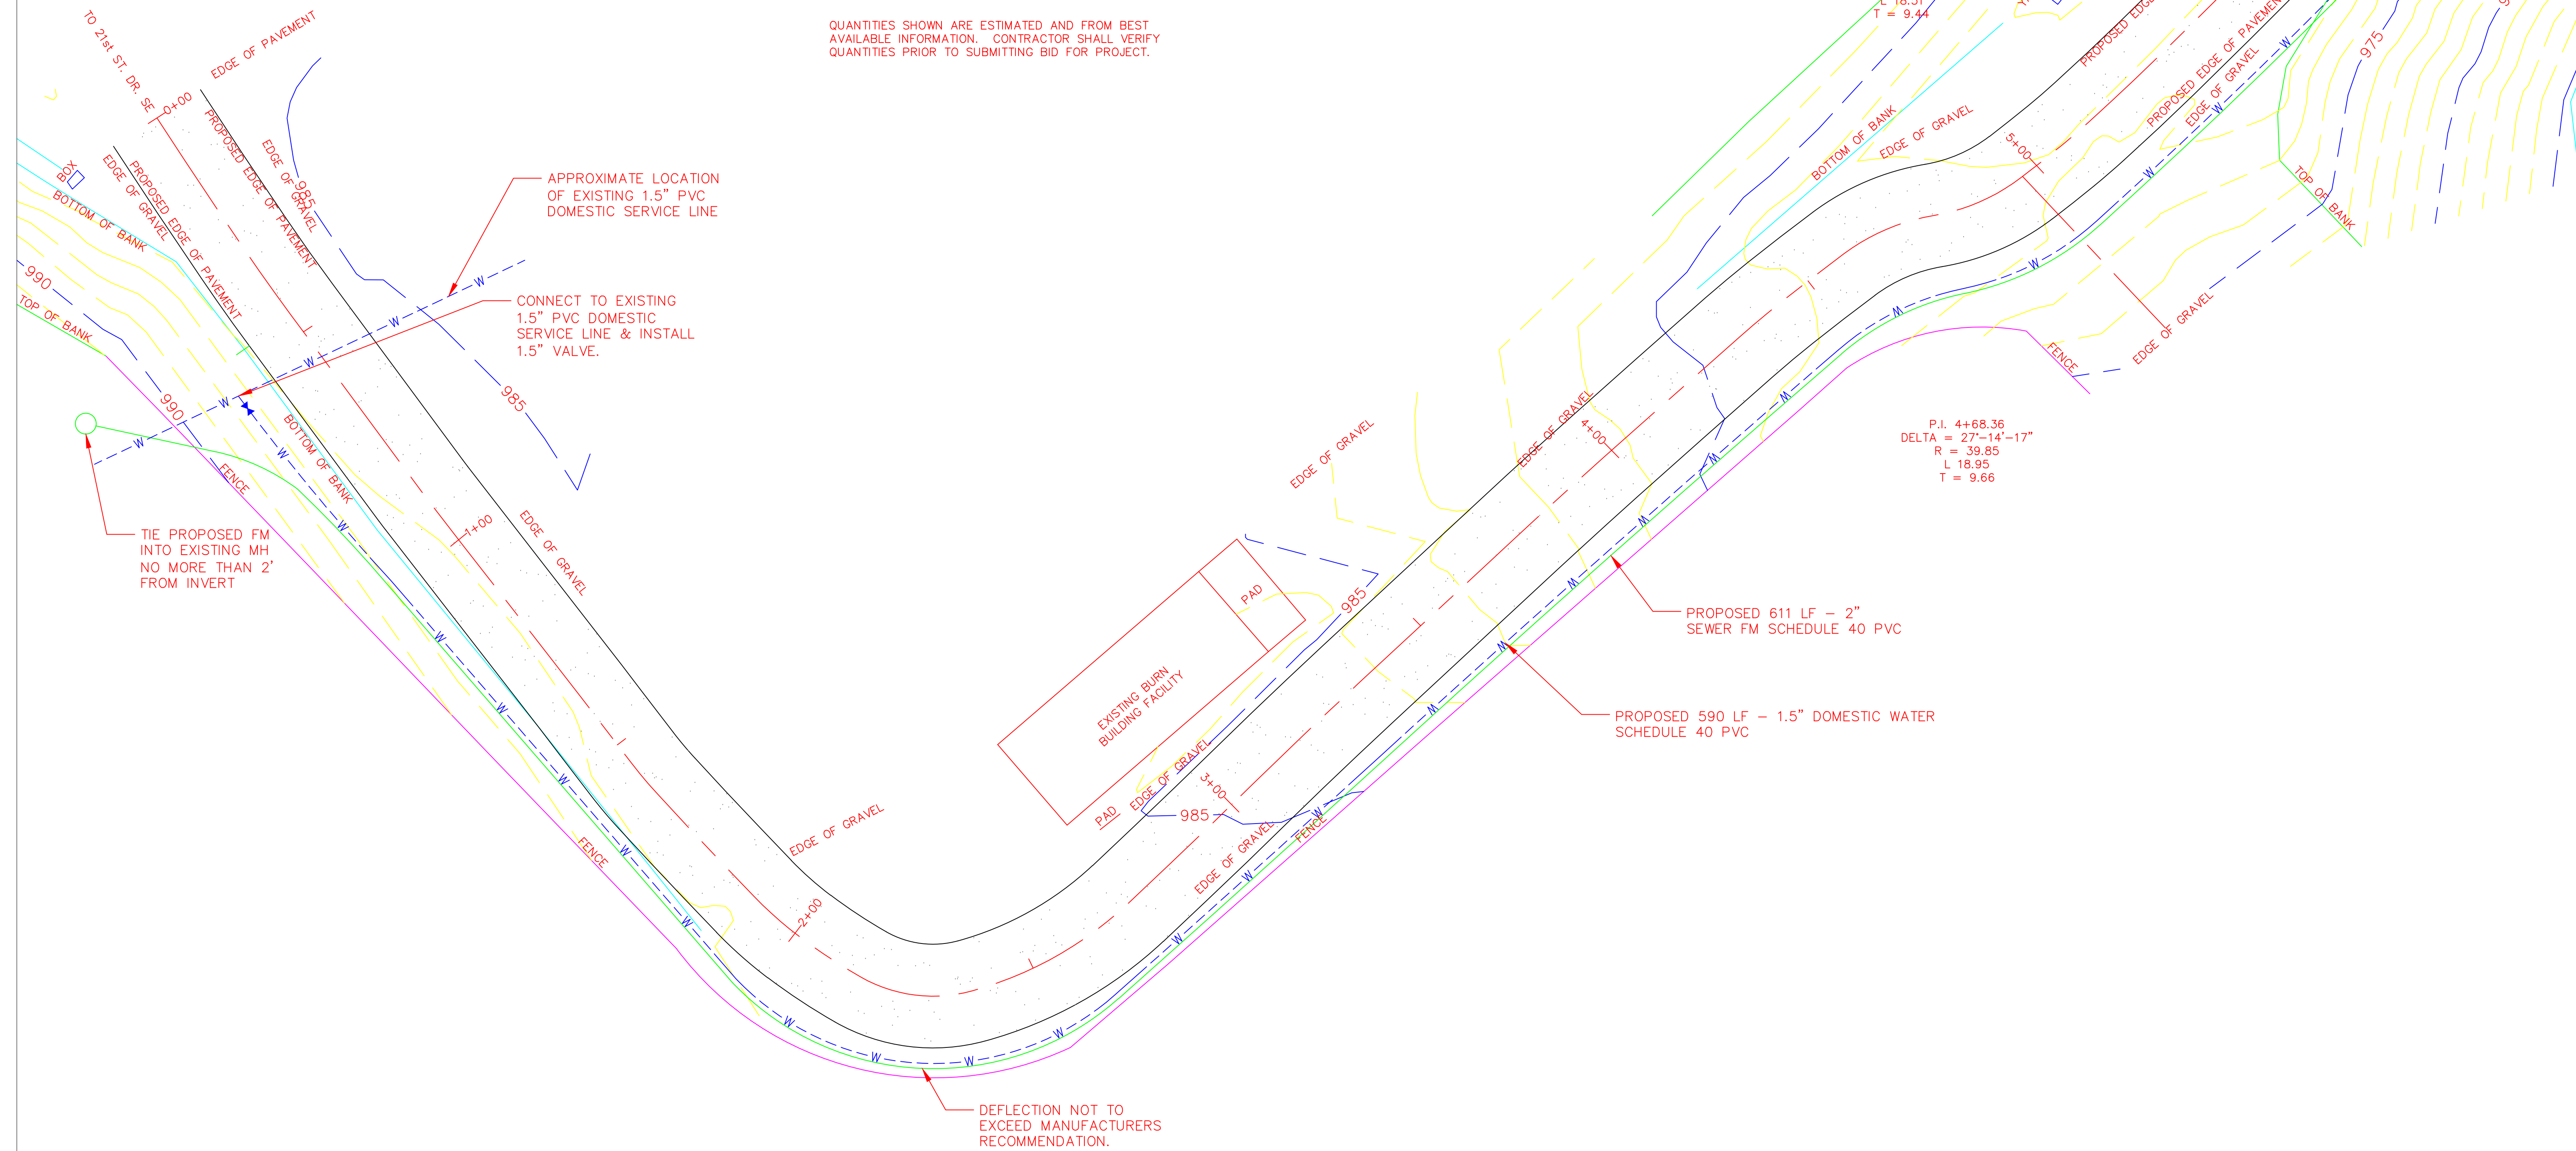

CITY OF HICKORY  
ENGINEERING DEPARTMENT  
76 NORTH CENTER STREET  
PO BOX 398  
HICKORY, NORTH CAROLINA 28603  
(828) 323-7416



**City of Hickory  
Public Safety Facility  
Plan**

REVISIONS

SCALE:  
PLAN : 1" = 15'



DATE: 010721  
DRAWN BY: JRP

Fire Department.DWG

SHEET 1 OF 2

PROJECT NUMBER  
21-012